


## Ficha Técnica Producto

### Imágenes



## Dimensiones

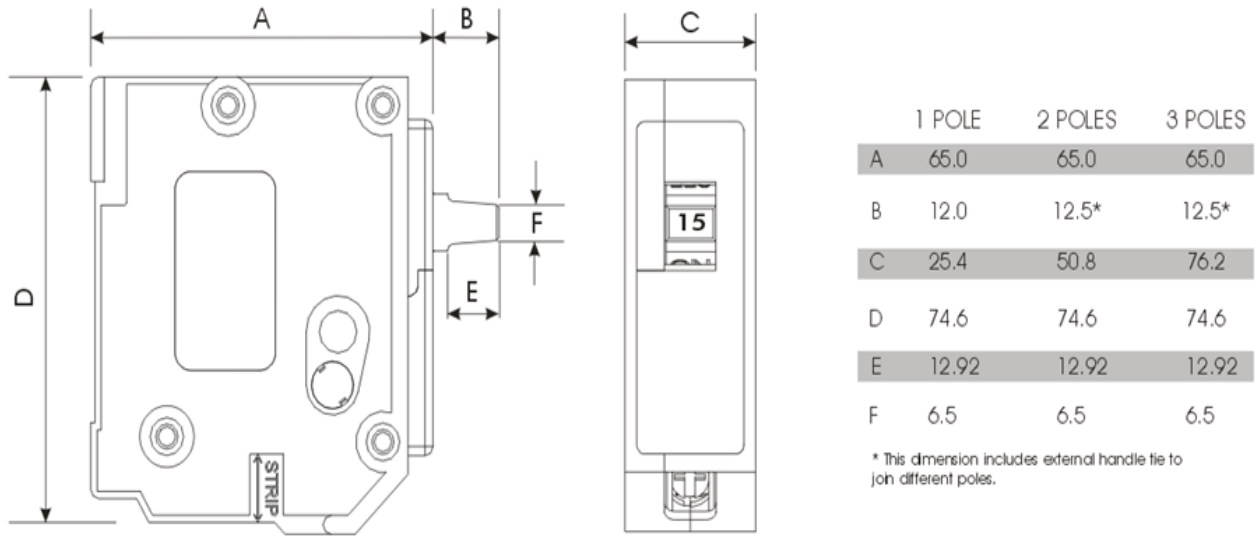

## Datos técnicos

Capacidad Interruptiva	10kA RMS at 120/240 V.A.C.
Referencias	DSE, DSA, STARSYS
Rangos	15 a 100 AMPERIOS
Tipos	1P, 2P y 3P.
Voltaje	120/240 V.A.C.
Estandar	UL - 489

## Conexión


60/75°C		TORQUE	
Cu WIRE(CONDUCTOR)			
mm <sup>2</sup>	(AWG)	N-m	(IN-LBS)
2,1 - 5,3	(14 - 10)	2,8	(25)
8,4 - 21,2	(8 - 4)	3,1	(27)
26,7 - 53,5	(3 - 1/0)	5,1	(45)

40°C



Calle 65A No 93-91  
Tel.: (57-1) 437 67 00  
Fax: (57-1) 2244534 - 436 26 54  
Bogotá D.C. - Colombia  
www.legrand.com.co

## Curva de Disparo

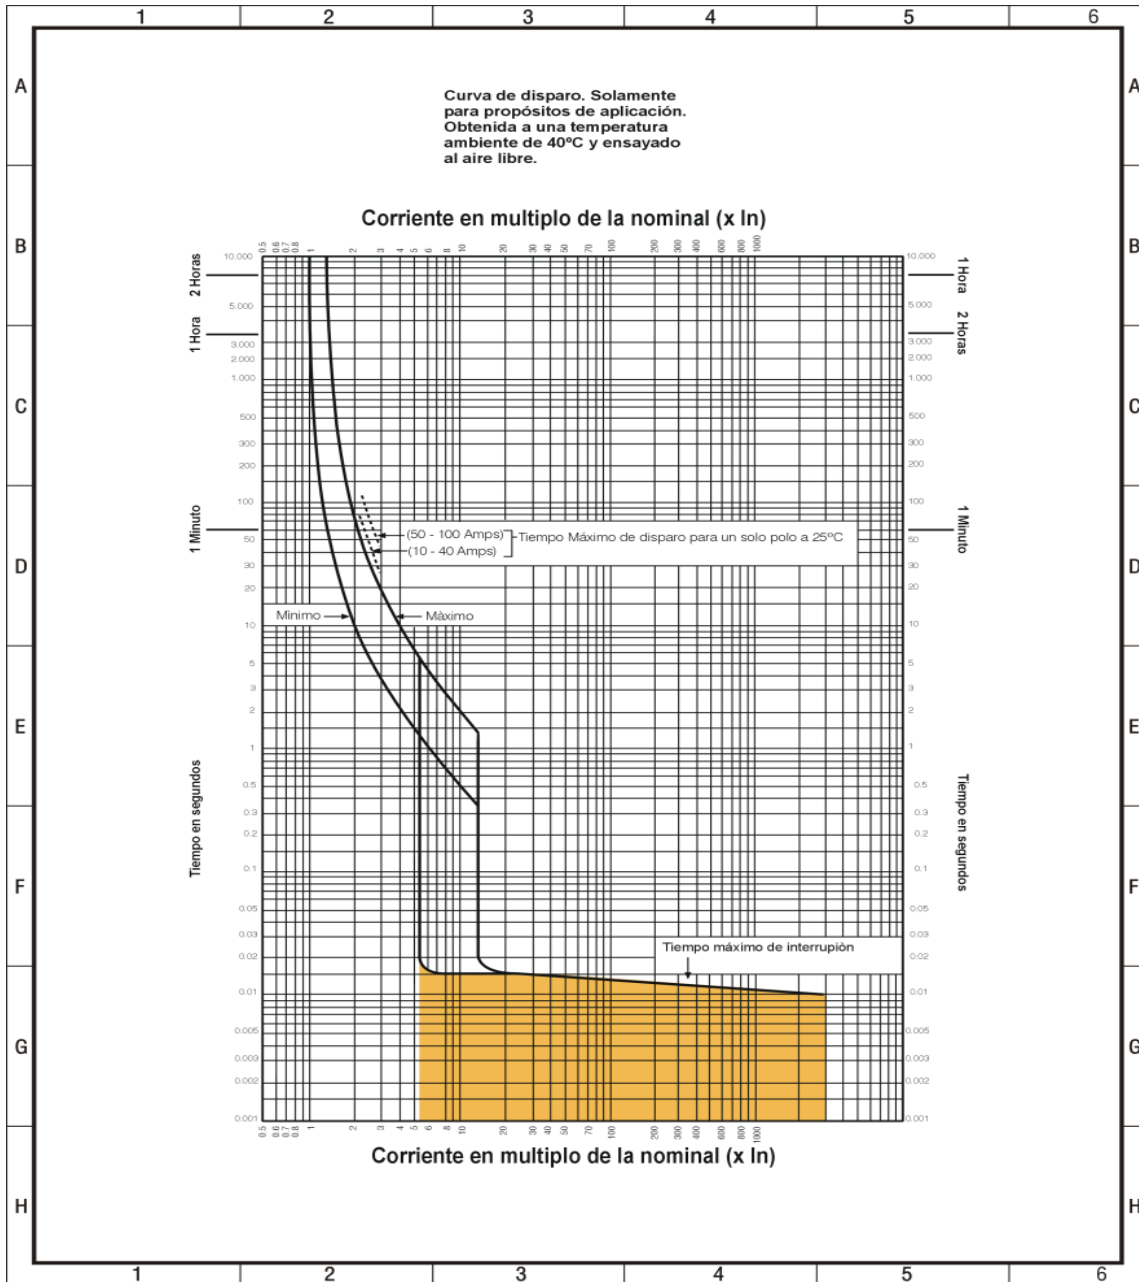

**bticino**  
**legrand**

**ORTRONICS**  
**LUMINEX**

Legrand Colombia S.A. NIT: 860.005.669-1  
Servicio al Cliente - Call Center  
En Bogotá 437 67 13 - 437 67 14  
Líneas gratuitas nacionales  
01 8000 9 10518 - 01 8000 9 12817