

Distribution shrink-fit terminations

Ranger2™ terminations

- Silicone polymer housing provides superior memory and weathering characteristics
- Shrink-fit housing uses common installation procedures and cable preparation dimensions, and field-removable center core allows for easy installation
- Three different shed designs for superior weathering:
 - Four sheds for 15 kV outdoor model
 - Six sheds for 25/28 kV outdoor model
 - Eight sheds for 35 kV outdoor model
- Three sizes cover entire cable range from #2 AWG to 1250 kcmil
- Units accommodate popular XLP and EPR cable types and various shield constructions
- Integral Hi-K voltage stress-control tube provides uniform voltage grading over the length of the termination and eliminates damaging voltage stress concentrations at the cable insulation shield edge
- Thick wall construction securely maintains critical interface pressure for consistent long-term reliability and performance
- Pull-down tabs for easy installation of built-in jacket seal – Accommodate CN, JCN, tape, wire or LC shielded cable construction
- Lightweight, compact design installs in restricted spaces and permits application where free hanging is desired
- Dark gray molded silicone insulator uses specially formulated silicone materials with improved UV stability, track, erosion and weather resistance for enhanced performance under the worst environmental conditions
- Optional connectors with copper stem and one-hole or two-hole spade
- Optional cable and support bracket with three sizes ranging from 0.80"–2.40" O.D.


Silicone polymer housings

The R2T and R2IT terminations are manufactured using an optimized weather-resistant silicone formulation. The housing offers superior cable sealing and voltage withstand characteristics.

Elastimold® terminations meet or exceed all requirements of IEEE 48 for Class 1 outdoor or Class 2 indoor terminations. Unit tests include voltage withstand wet and dry, before and after load cycling on units installed on maximum conductor sized cable.

Kit contents

Every R2T and R2IT comes complete with housing and stress tube preassembled on the core, ready for installation. Easy-to-read installation instructions will take you from cable preparation through installation. All kits include a tube of silicone grease, two plastic gloves and two strips of self-fusing silicone tape. Outdoor kits also include mastic for sealing. Metallic tape (M) kits include a grounding adapter for tape shield, wire shield and unshield cables. LC shield (L) kits include a high ampacity grounding adapter for longitudinally corrugated shield, tape shield and wire over tape shield cables.

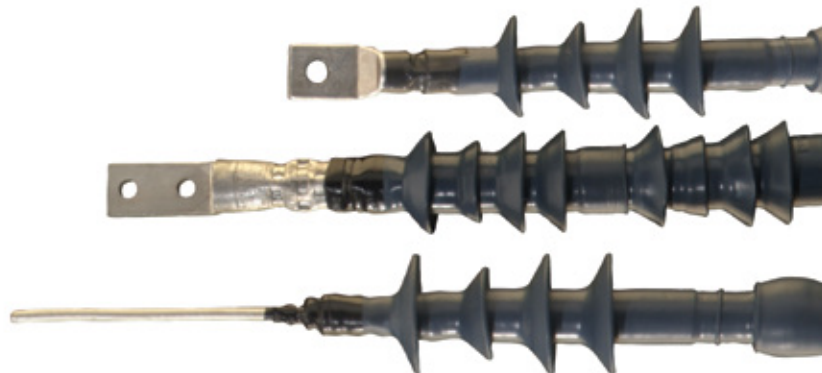

—
Stress relief

The R2T and R2IT terminations provide electric stress control for the cable by means of a flexible tube with a high permittivity dielectric constant.

The stress-relief tube is preassembled on the core under the polymer housing. As the core is removed, the stress-relief tube and housing shrink onto the cable at the same time, in exactly the right position. No secondary operations are required during installation. The electrical fields are refracted through the high dielectric constant tube and housing as shown.

—
Installation

Standard cable preparation techniques are used for all R2T Elastimold Ranger2 outdoor terminations and R2IT Elastimold Ranger2 indoor terminations. The Elastimold shrink-fit terminations are assembled on a removable core. After the termination is placed onto the prepared cable, the core is removed by pulling on the end. The housing then collapses onto the prepared cable. Memory of the material provides the interface solid dielectric and sealing properties required to meet the electrical ratings and prevent the ingress of moisture.

—
Certified

Elastimold Ranger2 terminations have been designed and tested per applicable portions of ANSI, IEEE, AEIC, ICEA and other industry standards.

IEEE 48

Standard for indoor and outdoor cable terminations.



ANSI C119.4

Standard for cable connectors for aluminum and copper conductors.

AEIC CS8-06 and ANSI/ICEA S-94-649-2004 and S-97-682-2000

Standards for XLP and EPR insulated cables.

—
Voltage stress

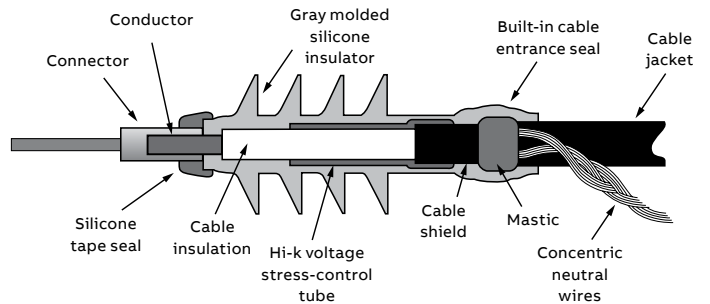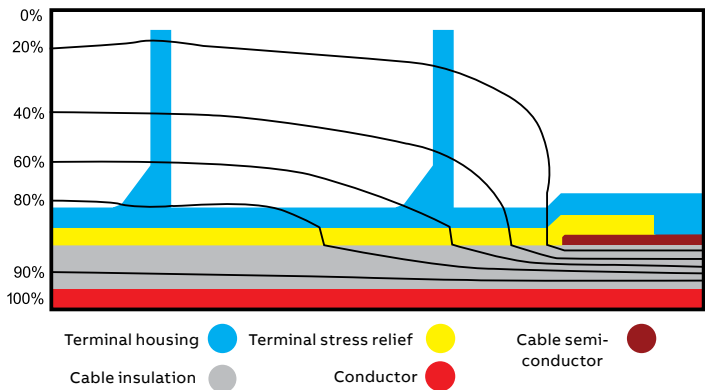

Distribution shrink-fit terminations

Ranger2™ terminations

Ratings

	R2IT15 indoor	R2T15 outdoor	R2T28 outdoor	R2T35 outdoor
Sizes available*	1, 2, 4	1, 2, 4	2, 4	2, 4
Voltage rating (kV)	15	15	25/28	35
Max. design voltage to ground (kV)	9.5	9.5	16	22
Corona extinction voltage (kV) (≤ 3 pC) (partial discharge)	13	13	22	30
Insulation withstand voltage:				
Lightning impulse (BIL dry 110 withstand) (kV crest)	110	110	150	200
10 Sec. wet (60 Hz) (kV)	–	45	60	80
1 Minute dry (60 Hz) (kV)	50	50	65	90
5 Hour dry (60 Hz) (kV)	35	35	55	75
DC withstand 15 min. dry (kV)	75	75	105	140

Application information

IEEE 48 classification	Outdoor = Class 1A, indoor = Class 2
Ambient temperature range	-30 °C to 65 °C
Power system frequency	48 to 62 Hz
Altitude range	3,300 feet max.
Mounting	Free hanging or optional bracket

Dimensions


	R2IT15 indoor	R2T15 outdoor	R2T28 outdoor	R2T35 outdoor
Sizes available*	1, 2, 4	1, 2, 4	2, 4	2, 4
Voltage rating (kV)	15	15	25/28	35
Number of sheds	0	4	6	8
Minimum strike distance in. (mm)	8.4 (213)	11.6 (295)	14.5 (368)	16.8 (427)
Creepage distance in. (mm)	8.4 (213)	15.0 (381)	22.8 (579)	30.0 (762)

* See page XX for cable insulation diameter ranges.

The R2T and R2IT termination design couples shrink-fit technology and Elastimold®'s pull-down jacket seal feature to provide a termination line that covers the widest range of applications with the fewest number of models. Three sizes cover 0.64" (16 mm) to 2.10" (53 mm) insulation diameter cables (#2 AWG through 1250 kcmil).

The R2T housings are designed for maximum performance in all field conditions with superior creepage and strike distances for long-term service. Insulating silicone sleeves are also available when more creepage is required or when wildlife protection is needed to insulate the connectors. Contact your ABB sales representative for further information.

Ranger2 terminations base catalog numbers

				Cable range (insulation diameter)		Concentric neutral and jacketed concentric neutral cable	Tape shield, wire shield and unishield cable	LC shield, wire over tape shield and tape shield cable	Cat. No.
	kV class	kV class	Inches	mm					
	15	Indoor	0.64 to 1.12	16.3 to 28.4	R2IT15J1	R2IT15M1	R2IT15L1		
			0.84 to 1.38	21.3 to 35.1	R2IT15J2	R2IT15M2	R2IT15L2		
			1.30 to 2.10	33.0 to 53.3	R2IT15J4	R2IT15M4	R2IT15L4		
	15	Outdoor	0.64 to 1.12	16.3 to 28.4	R2T15J1	R2T15M1	R2T15L1		
			0.84 to 1.38	21.3 to 35.1	R2T15J2	R2T15M2	R2T15L2		
			1.30 to 2.10	33.0 to 53.3	R2T15J4	R2T15M4	R2T15L4		
	25/28	Outdoor	0.84 to 1.38	20.3 to 35.1	R2T28J2	R2T28M2	R2T28L2		
			1.30 to 2.10	33.0 to 53.3	R2T28J4	R2T28M4	R2T28L4		
	35	Outdoor	0.84 to 1.38	20.03 to 35.1	R2T35J2	R2T35M2	R2T35L2		
			1.30 to 2.10	33.0 to 53.3	R2T35J4	R2T35M4	R2T35L4		